

ISO 9001:2008 Registered

# ***Digital Hanging & Crane Scales***

CS200™ Hanging Scale / CS750™ Hanging Scales / CS1500™ Crane Scales / CS3000™ Crane Scales



**Intercomp®**  
advanced weighing technology . . . by any measure

[intercompcompany.com](http://intercompcompany.com)

# Digital Hanging & Crane Scales

## CS200™

### High Accuracy, Compact Digital Hanging Scales for Low Capacity Applications

Available in 25lb (13kg) to 500lb (250kg) Capacities, this extremely compact and light-weight scale weighs only 1.6 lb (0.7kg). Features a large, easy-to-read, 0.5" Backlit LCD Display, large push button controls and operates up to 300 hours on a standard 9-Volt Battery.



CE

Part Number	Capacity	Graduation
100775	25lb (13kg)	.01lb (.01kg)
100774	50lb (25kg)	.02lb (.01kg)
100773	100lb (50kg)	.05lb (.02kg)
100772	250lb (125kg)	.1lb (.05kg)
100771	500lb (250kg)	.2lb (.1kg)

#### Includes:

- Top Eye Hook
- Bottom Hook

#### Performance

Accuracy: ±0.1%

#### Controls

General: On/Off, Zero & lb/kg  
Display: 0.5" (12mm) LCD

#### Environmental

Humidity: 10 to 95% Non-Condensing  
Temperature: -4° to 140°F (-20° to 60°C)

#### Physical

Overload: 200% of Capacity

#### Electrical

Battery: Standard Alkaline or Rechargeable 9-Volt  
Battery Life: 300 Hours

## CS750™

NTEP Approved Models Available

### Heavy Duty Digital Hanging Scale for Light Industrial Applications

This heavy-duty hanging scale features a large, easy-to-read, 1" Backlit LCD Display, large push button controls and operates up to 250 hours on standard D-Cell Batteries.



CE



Infrared Remote Control Standard

Part Number	Capacity	Graduation
100652	100lb (50kg)	.05lb (.02kg)
100653	300lb (150kg) *	.10lb (.05kg)
100654	500lb (250kg) *	.2lb (.1kg)
100655	1,000lb (500kg) *	.5lb (.2kg)

\* NTEP approved

#### Includes

- Infrared Remote Control
- Crosby Eye Hook
- Bottom Swivel Hook

#### Performance

Accuracy: ±0.1%

#### Controls

General: On, Off, Zero & Backlight  
Display: 1" (25mm) LCD  
Indicators: lb/kg

#### Environmental

Humidity: 10 to 95% Non-Condensing  
Temperature: -4° to 140°F (-20° to 60°C)

#### Physical

Overload: 200% of Capacity

#### Electrical

Battery: Standard Alkaline or Rechargeable D-Cell  
Battery Life: 250 Hours

#### Options:

RS232 Serial Output  
LED Display  
Direct Power  
Printer



## CS1500™ NTEP Approved for All Capacities

### Low-cost, High Performance Digital Crane Scale for Medium Capacity Industrial Applications

The CS1500- Crane scale features a large, easy-to-read, LED Display, large push button controls and operates up to 300 hours on standard D-Cell Batteries.



Part Number	Capacity	Graduation
100661	500lb (250kg) *	.2lb (.1kg)
100662	1,000lb (500kg) *	.5lb (.02kg)
100663	2,000lb (1,000kg) *	1lb (1kg)
100664	5,000lb (5,000kg) *	2lb (1kg)
100665	10,000lb (5,000kg) *	5lb (2kg)
100666	20,000lb (10,000kg) *	10lb (5kg)

\* NTEP approved

#### Includes:

- Infrared Remote Control
- Crosby Eye Hook
- Bottom Swivel Hook

#### Performance

Accuracy:  $\pm 0.1\%$

#### Controls

General: On, Off, Zero, Tare, Print, Mode & Set  
 Display: 0.8" (20mm) LED  
 Indicators: lb/kg, Gross, Net, Tare & Peak Hold

#### Environmental

Humidity: 10 to 95% Non-Condensing  
 Temperature: -4° to 140°F (-20° to 60°C)

#### Physical

Overload: 200% of Capacity

#### Electrical

Battery: Standard Alkaline or Rechargeable D-Cell  
 Battery Life: 30 Hours

#### Options:

RS232 Serial Output  
 LCD Display  
 Direct Power  
 Printer

## CS3000™ NTEP Approved Models Available

### Fully Featured High Capacity Industrial Crane Scale for Heavy Duty Applications

The CS3000- now features Fully Integrated RFX™ Wireless Weighing Technology. The Handheld RFX™ Wireless Indicator controls scale functions at a safe distance, including On and Off, improving any operation.



Part Number	Capacity	Graduation
100681-RFX	2,000lb (1,000kg) *	1lb (1kg)
100682-RFX	5,000lb (5,000kg) *	1lb (1kg)
100683-RFX	10,000lb (5,000kg) *	2lb (1kg)
100684-RFX	20,000lb (10,000kg) *	5lb (2kg)
100685-RFX	30,000lb (15,000kg) *	10lb (5kg)
100686-RFX	50,000lb (25,000kg) *	10lb (5kg)
100687-RFX	70,000lb (35,000kg)	20lb (10kg)
100688-RFX	100,000lb (50,000kg)	20lb (10kg)

Larger Capacities Available Upon Request

\* NTEP approved

#### Includes:

- Handheld RFX™ Wireless Indicator with Rechargeable Batteries, Battery Charger & Case
- Top Eye Hook
- Crosby S-1 Swivel Hook

#### Performance

Accuracy:  $\pm 0.1\%$

#### Controls

General: Power, Accum Total, Mode, Zero, lb/kg, Tare  
 Display: 2" (51mm) LCD  
 Indicators: lb, kg, Net, Gross, Total, Tare, S1, S2, Peak, Battery Life

#### Environmental

Humidity: 10 to 95% Non-Condensing  
 Temperature: -4° to 140°F (-20° to 60°C)

#### Physical

Overload: 200% of Capacity

#### Electrical


Battery in Scales: Standard Alkaline or Rechargeable D-Cell  
 Battery Life in Scales: 3,000 Hours  
 Battery in Indicator: Standard Alkaline or Rechargeable AA  
 Battery Life in Indicator: 40 Hours

#### Options:

RS232 Serial Output  
 Direct Power  
 Printer  
 Anti-Heat Shield (Foundry Package)  
 Anti-Magnetic Shield  
 Oversized Top Eye Hook or Shackles

3,000 Hour Battery  
 Life in Scales  
 40 Hours in Indicator



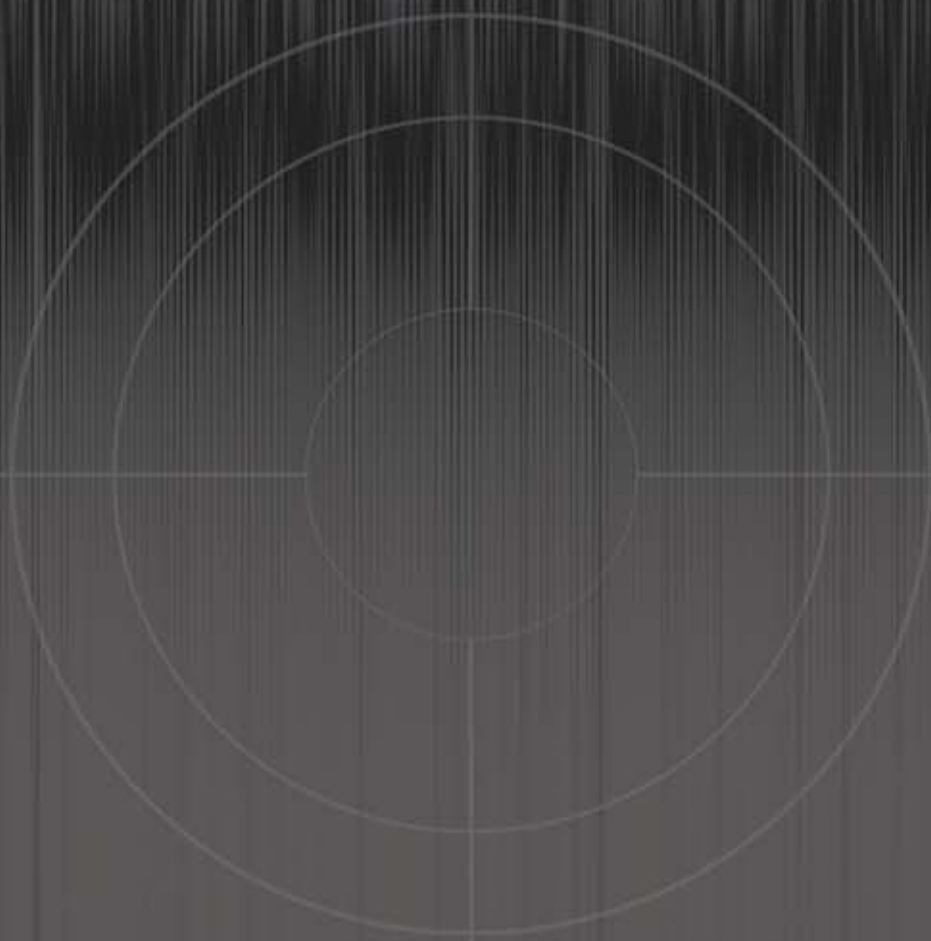

Intercomp Company, Inc. is the world's largest manufacturer of portable weighing solutions, and has been serving the industrial, material handling and transportation industries for over 30 years. With ISO 9001:2008 Registered facilities in the United States and United Kingdom and all standards traceable to NIST, we can deliver the products to meet your most exacting specifications.

***See for yourself how Intercomp provides advanced weighing technology...by any measure.***

***intercompcompany.com***

**Toll Free: 800-328-3336**

Worldwide: 763/476-2531 • Fax: 763/476-2613

Email: [info@intercompcompany.com](mailto:info@intercompcompany.com)



ISO 9001:2008  
Registered



**Intercomp®**  
advanced weighing technology ... by any measure

3839 County Road 116  
Medina, Minnesota 55340-9342 U.S.A.